




## **UA18/UA30 Basic Series - Ultrasonic Sensors**

**Sense**

# UA18/30 Series

## Ultrasonic sensors

This new ultrasonic sensor series of UA18 and UA30 sensors provides superior sensing solutions with a good price-performance-ratio for a variety of industry applications. The UA sensors are excellent at contactless position and distance measurement and they are able to detect any target regardless of its colour, transparency or surface. Because of their resistance to high and low temperatures and immunity against dust, steam and fumes, these UA sensors are especially well suited to harsh environments. The UA18 and UA30 come in a two digital output version and a combined version with one digital and one analogue output. Sensing distances go from 50 to 3500 mm and both cable and plug versions are available. Due to improved technology, an extended sensing distance and a reduced housing length, these sensors make for a state of the art sensor family with high accuracy, versatility and resilience!

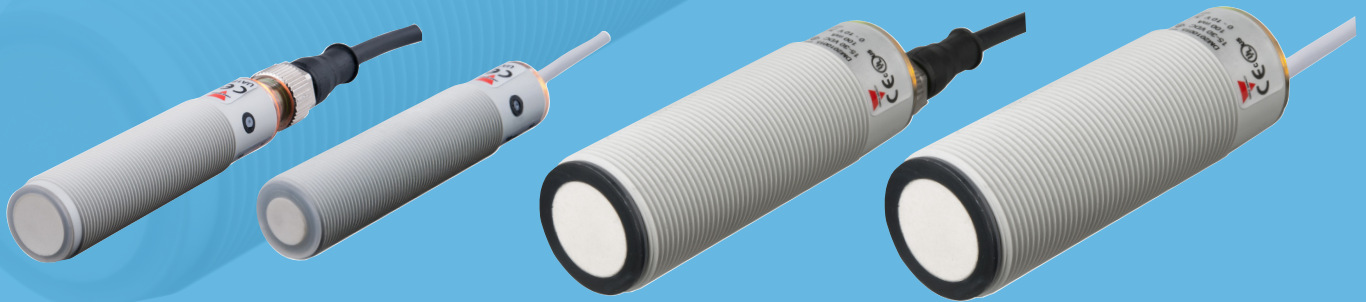

### Short blind zone

The new UA sensors offer a reduced blind zone which improves the mounting flexibility and minimizes the space required for reliable detection.

### Easy teach-in

Sensing modes are easily set by two simple clicks on the teach-in button.

### Long sensing distance

The UA sensor family includes a wide range of models covering operational ranges of up to 3500 mm.

### Reduced housing length

The new housing has been made even smaller for better space saving.

### Harsh environments

The robust, solid-cast housing is specifically designed and well suited to industries where environmental conditions such as lighting, dust, fumes and steam challenge the sensing performance.

### Approvals

CE (EN60947-5-2)  
cULus (UL508)



## Features and functions

### UA18CAD....



UA18: M18 x 83.6 mm (Cable)  
 UA18: M18 x 77.7 mm (Plug)

### UA 30CAD....



UA30: M30 x 89.5 mm (Cable)  
 UA30: M30 x 89.5 mm (Plug)


### Locknut




All UA30 models include a locknut with retention grips for tight mounting.

## Digital outputs NPN or PNP

Normal switching operation




Adjustable hysteresis operation

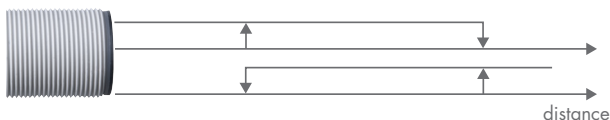


Featuring two digital outputs, the digital UA sensors can operate in two different modes: normal switching or adjustable hysteresis. The outputs are independently teachable via the teach-in button. Modes are easily set and adjusted for on/off or filling/emptying functionality.

## Analogue and Digital outputs NPN or PNP

Negative slope

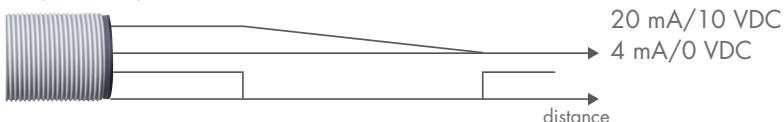

Positive slope

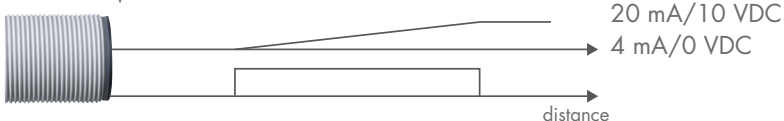


The analogue UA sensors offer a combined output configuration: one digital and one analogue output. The analogue output of 4-20 mA or 0-10 VDC can be configured as either "positive slope" or "negative slope". The slope is defined by two teachable setpoints. The digital output forms a sensing window in which the output is either active or inactive between the setpoints (P2 and P1). These are useful features for distance measurement, level measurement, diameter measurement or loop control.

## Applications

### Diameter measurement

The UA18 and UA30 sensors are ideal for accurate measurement of changing diameters, such as reels and drums in paper, aluminium and other metal manufacturing, textile, plastics and packaging industries. The sensors provide a precise output of the diameter in rolls or drums as it changes when materials wind or unwind.

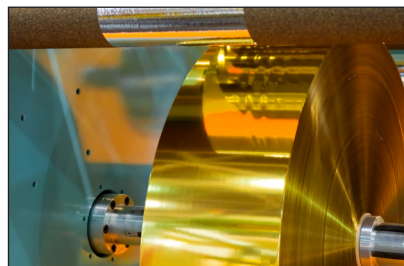

### Parts counting & presence detection

Because of their superior ability to detect clear, transparent objects and to measure distance, the UA18/UA30 sensors are a perfect choice for a wide range of applications. Parts are precisely detected and positioned and objects or persons are counted by the UA18/UA30 sensors in areas dealing with people, robots, glass, fluids, food & beverage, solid objects, car wash and materials handling.




### Level detection

The UA18 and UA30 sensors are superb at detecting the level of fluids, semi fluids and solids, such as water in a tank or grain in a container. Typical applications include printing machines, hoppers, agricultural manufacturing, food & beverage, water treatment, chemical industry, analysis work and power plants.



### Tension control

Monitoring and control of speed, position and tension of materials being processed are efficiently and accurately performed by the UA18/UA30 sensors. The sensors monitor the slope of loops and synchronise the speed between machines, securing a stable working flow. These features are useful in metal working, paper, aluminium, textile and plastics manufacturing as well as packaging and chemical industries.

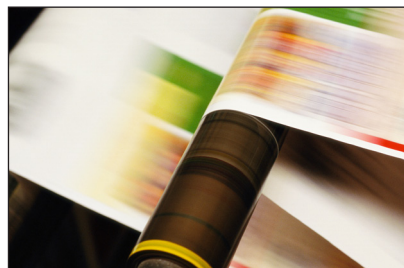

### Height and size measurement

The UA18 and UA30 sensors are successfully used in applications which measure the height or size of objects moving past the sensor or for stacking operations in industries such as the automotive industry, printing machines, metal working, package & distribution, food & beverage, bottle sorting, agriculture, robots, the electronics industry, glass and materials handling.





## The UA18 and UA30 Basic Family

			2 x Digital outputs		Analogue + Digital output			
			M18	M30	M18		M30	
Conne- ction	Out- put	Distance	UA18CAD...	UA30CAD...	UA18CAD...		UA30CAD...	
Cable	NPN	50 - 400 mm	<b>04NPTI</b>		<b>04NGTI</b>	<b>04NKTI</b>		
		100 - 900 mm	<b>09NPTI</b>		<b>09NGTI</b>	<b>09NKTI</b>		
		200 - 2200 mm	<b>22NPTI</b>		<b>22NGTI</b>	<b>22NKTI</b>		
		250 - 3500 mm		<b>35NPTI</b>			<b>35NGTI</b>	<b>35NKTI</b>
	PNP	50 - 400 mm	<b>04PPTI</b>		<b>04PGTI</b>	<b>04PKTI</b>		
		100 - 900 mm	<b>09PPTI</b>		<b>09PGTI</b>	<b>09PKTI</b>		
		200 - 2200 mm	<b>22PPTI</b>		<b>22PGTI</b>	<b>22PKTI</b>		
		250 - 3500 mm		<b>35PPTI</b>			<b>35PGTI</b>	<b>35PKTI</b>
Plug	NPN	50 - 400 mm	<b>04NPM1TI</b>		<b>04NGM1TI</b>	<b>04NKM1TI</b>		
		100 - 900 mm	<b>09NPM1TI</b>		<b>09NGM1TI</b>	<b>09NKM1TI</b>		
		200 - 2200 mm	<b>22NPM1TI</b>		<b>22NGM1TI</b>	<b>22NKM1TI</b>		
		250 - 3500 mm		<b>35NPM1TI</b>			<b>35NGM1TI</b>	<b>35NKM1TI</b>
	PNP	50 - 400 mm	<b>04PPM1TI</b>		<b>04PGM1TI</b>	<b>04PKM1TI</b>		
		100 - 900 mm	<b>09PPM1TI</b>		<b>09PGM1TI</b>	<b>09PKM1TI</b>		
		200 - 2200 mm	<b>22PPM1TI</b>		<b>22PGM1TI</b>	<b>22PKM1TI</b>		
		250 - 3500 mm		<b>35PPM1TI</b>			<b>35PGM1TI</b>	<b>35PKM1TI</b>
Rated operational voltage (U <sub>v</sub> ) (5 % ripple included)			15 to 30 V DC	12 to 30 V DC	15 to 30 V DC	12 to 30 V DC	15 to 30 V DC	
No load supply current (I <sub>v</sub> )			CAD04: ≤ 45 mA, CAD09: ≤ 45 mA, CAD22: ≤ 50 mA and CAD35: ≤ 50 mA					
Digital output			Open collector, NPN or PNP by sensor type					
Digital output function			Standard 2 switchpoint or adjustable hysteresis for Level control		Digital output with windows function and analogue output with positive or negative slope			
Digital output current (I <sub>o</sub> )			≤ 500 mA (max. Load capacity 100 nF), (UL508 ≤ 100 mA)			≤ 100 mA (max. Load capacity 100 nF)		
Minimum operational current, digital (I <sub>m</sub> )			≤ 0,5 mA					
Off-State current, digital (I <sub>o</sub> )			≤ 10 µA					
Voltage drop, digital (U <sub>v</sub> )			≤ 2.2 V DC @ I <sub>o</sub> max					
Output function, analogue			0 to 20 mA		0 to 10 V DC	0 to 20 mA	0 to 10 V DC	
Minimum resistive load, analogue			≥ 3 kΩ					
Sensor protection, digital output			Shortcircuit (A), reverse polarity (B) and transients (C)					
Response time			CAD04: ≤ 45 mS, CAD09: ≤ 125 mS, CAD22: ≤ 500 mS and CAD35: 250mS					
Power on delay (t <sub>v</sub> )			≤ 900 mS		≤ 500 mS		≤ 300 mS	
Repeatability			0.50%			0.20%		
Linear accuracy			1%	0.5%	1%		0.5%	
Resolution			1 mm					
Beam angle			CAD04: ±8°, CAD09: ±7°, CAD22: ±7° and CAD35: ±6°					
Temperature drift			≤ 0.1% / °C					
Temperature compensation			Yes					
Hysteresis			≥ 1 %			≥ 0.5 %		
Led indications			Target detected (Yellow LED), Echo received (Green LED M30 sensor only)					
Sensitivity control			Teach-in button for setpoint P1 and P2					
Degree of protection			IP67 (IEC 60529; 60947-1)					
Ambient temperature			-20 to +60 °C (-4 to +140 °F) no condensation, Storage -40 to +70 °C (-35 to +158 °C )					
Ambient humidity			35 to 85 % RH, storage: 35 to 85 % RH					
CE marking			According to EN 60947-5-2					
Approvals			cULus (UL508)					
Installation category			III (IEC60664/60664A; 60947-1)					
Pollution degree			3(IEC60664/60664A; 60947-1)					
Vibration			10 to 150 Hz, (1,0 mm/15G; IEC 60068-2-6) in X,Y and Z direction					
Shock			30G /11 mS. 3 positive and 3 negative in X,Y and Z direction					
Material			Body, PBT light grey; Front Epoxy-glass resin, Backpart Grilamide, Teach-in shaft POM					
Cable			PCV, grey, 2 m, 4 x 0.34 mm <sup>2</sup> , Ø=4.7 mm					
Connector			M12, 4-pin					
Dimensions			UA18 cable: M18 x 83.6 mm, UA18 plug: M18 x 77.7 mm, UA30 cable/plug: M30 x 89.5 mm,					
Weight incl. packaging			M18 cable version ≤ 100 g, plug version ≤ 35 g M30 cable version ≤ 160 g, plug version ≤ 90 g					
Accessories, additional			Connectors: CONM14NF... Types					

## OUR SALES NETWORK IN EUROPE

**AUSTRIA** - Carlo Gavazzi GmbH  
Ketzergrasse 374, A-1230 Wien  
Tel: +43 1 888 4112  
Fax: +43 1 889 10 53  
office@carlogavazzi.at

**BELGIUM** - Carlo Gavazzi NV/SA  
Mechelsesteenweg 311,  
B-1800 Vilvoorde  
Tel: +32 2 257 4120  
Fax: +32 2 257 41 25  
sales@carlogavazzi.be

**DENMARK** - Carlo Gavazzi Handel A/S  
Over Hadstenvej 40, DK-8370 Hadsten  
Tel: +45 89 60 6100  
Fax: +45 86 98 15 30  
handel@gavazzi.dk

**FINLAND** - Carlo Gavazzi OY AB  
Petaksentie 2-4, FI-00661 Helsinki  
Tel: +358 9 756 2000  
Fax: +358 9 756 20010  
myynti@gavazzi.fi

**FRANCE** - Carlo Gavazzi Sarl  
Zac de Paris Nord II, 69, rue de la Belle  
Etoile, F-95956 Roissy CDG Cedex  
Tel: +33 1 49 38 98 60  
Fax: +33 1 48 63 27 43  
french.team@carlogavazzi.fr

**GERMANY** - Carlo Gavazzi GmbH  
Pfnorsir. 10-14  
D-64293 Darmstadt  
Tel: +49 6151 81000  
Fax: +49 6151 81 00 40  
info@gavazzi.de

**GREAT BRITAIN** - Carlo Gavazzi UK Ltd  
7 Springlakes Industrial Estate,  
Deadbrook Lane, Hants GU12 4UH,  
GB-Aldershot  
Tel: +44 1 252 339600  
Fax: +44 1 252 326 799  
sales@carlogavazzi.co.uk

**ITALY** - Carlo Gavazzi SpA  
Via Milano 13, I-20020 Lainate  
Tel: +39 02 931 761  
Fax: +39 02 931 763 01  
info@gavazziacbu.it

**NETHERLANDS** - Carlo Gavazzi BV  
Wijkermeerweg 23,  
NL-1948 NT Beverwijk  
Tel: +31 251 22 9345  
Fax: +31 251 22 60 55  
info@carlogavazzi.nl

**NORWAY** - Carlo Gavazzi AS  
Melkeveien 13, N-3919 Porsgrunn  
Tel: +47 35 93 0800  
Fax: +47 35 93 08 01  
post@gavazzi.no

**PORTUGAL** - Carlo Gavazzi Lda  
Rua dos Jerónimos 38-B,  
P-1400-212 Lisboa  
Tel: +351 21 361 7060  
Fax: +351 21 362 13 73  
carlogavazzi@carlogavazzi.pt

**SPAIN** - Carlo Gavazzi SA  
Avda. Iparraguirre, 80-82,  
E-48940 Leioa (Bizkaia)  
Tel: +34 94 480 4037  
Fax: +34 94 480 10 61  
gavazzi@gavazzi.es

**SWEDEN** - Carlo Gavazzi AB  
V:a Kyrkogatan 1,  
S-652 24 Karlstad  
Tel: +46 54 85 1125  
Fax: +46 54 85 11 77  
info@carlogavazzi.se

**SWITZERLAND** - Carlo Gavazzi AG  
Verkauf Schweiz/Vente Suisse  
Sumpfstrasse 32,  
CH-6312 Steinhausen  
Tel: +41 41 747 4535  
Fax: +41 41 740 45 40  
info@carlogavazzi.ch

## OUR SALES NETWORK IN NORTH AMERICA

**USA** - Carlo Gavazzi Inc.  
750 Hastings Lane,  
USA-Buffalo Grove, IL 60089,  
Tel: +1 847 465 6100  
Fax: +1 847 465 7373  
sales@carlogavazzi.com

**CANADA** - Carlo Gavazzi Inc.  
2660 Meadowvale Boulevard,  
CDN-Mississauga Ontario L5N 6M6,  
Tel: +1 905 542 0979  
Fax: +1 905 542 22 48  
gavazzi@carlogavazzi.com

**MEXICO** - Carlo Gavazzi Mexico S.A. de C.V.  
Calle La Montaña no. 28, Fracc. Los Pastores  
Naucalpan de Juárez, EDOMEX CP 53340  
Tel & Fax: +52.55.5373.7042  
mexicosales@carlogavazzi.com

## OUR SALES NETWORK IN ASIA AND PACIFIC

**SINGAPORE** - Carlo Gavazzi Automation  
Singapore Pte. Ltd.  
61 Tai Seng Avenue  
#05-06 UE Print Media Hub  
Singapore 534167  
Tel: +65 67 466 990  
Fax: +65 67 461 980

**MALAYSIA** - Carlo Gavazzi Automation  
(M) SDN. BHD.  
D12-06-G, Block D12,  
Pusat Perdagangan Dana 1,  
Jalan PJU 1A/46, 47301 Petaling Jaya,  
Selangor, Malaysia.  
Tel: +60 3 7842 7299  
Fax: +60 3 7842 7399

**CHINA** - Carlo Gavazzi Automation  
(China) Co. Ltd.  
Unit 2308, 23/F.,  
News Building, Block 1, 1002  
Middle Shennan Zhong Road,  
Shenzhen, China  
Tel: +86 755 83699500  
Fax: +86 755 83699300

**HONG KONG** - Carlo Gavazzi  
Automation Hong Kong Ltd.  
Unit 3 12/F Crown Industrial Bldg.,  
106 How Ming St., Kwun Tong,  
Kowloon, Hong Kong  
Tel: +852 23041228  
Fax: +852 23443689

## OUR COMPETENCE CENTRES AND PRODUCTION SITES

Carlo Gavazzi Industri A/S  
Hadsten - **DENMARK**

Carlo Gavazzi Ltd  
Zejtun - **MALTA**

Carlo Gavazzi Controls SpA  
Belluno - **ITALY**

Uab Carlo Gavazzi Industri Kaunas  
Kaunas - **LITHUANIA**

Carlo Gavazzi Automation  
(Kunshan) Co., Ltd.  
Kunshan - **CHINA**

## HEADQUARTERS

Carlo Gavazzi Automation SpA  
Via Milano, 13 - I-20020  
Lainate (MI) - **ITALY**  
Tel: +39 02 931 761  
info@gavazziautomation.com



**CARLO GAVAZZI**  
Automation Components

*Energy to Components!*

www.gavazziautomation.com

